


# Traycard insert for jewel case

Usually printed 4/0. The back side is not seen unless a clear tray is used.

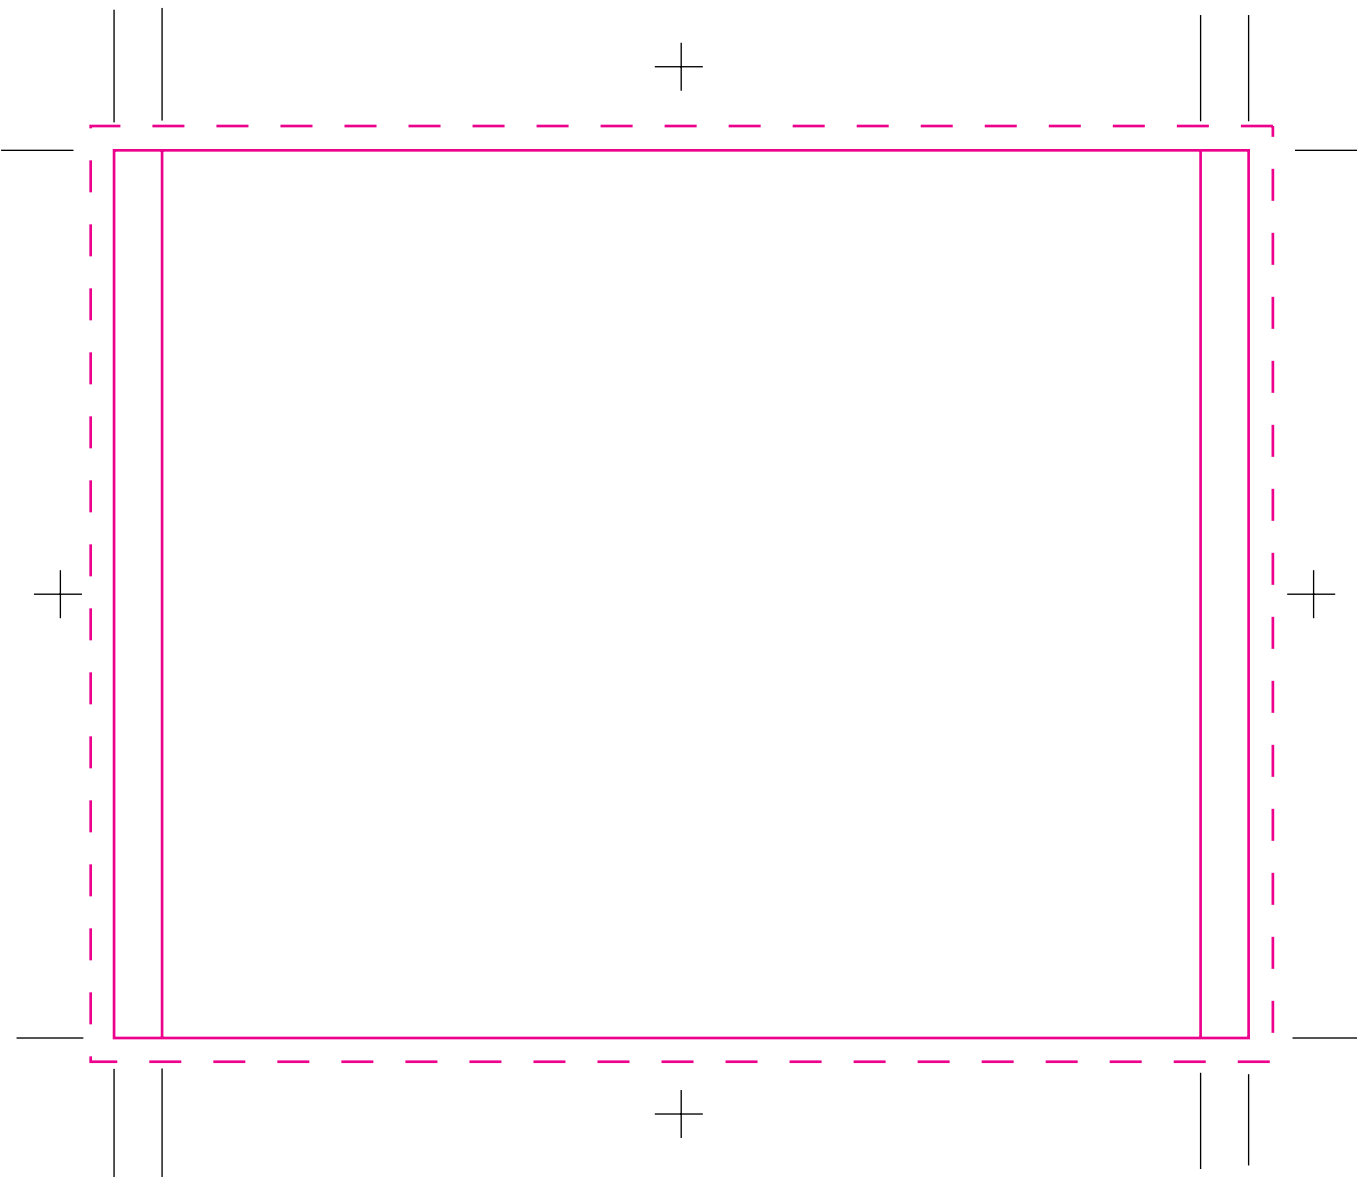

PRINTED SIDE

## read me

**bullseyedisc**

previously cd-rom-works  
800.652.7194

— Die/Fold/Notes

- - - - - Bleed

### CHECK LIST

Reference the "Prepress Tips" page from our "Developer's Spec Kit" (available on our web site).

### COLORS

Use only Process colors (CMYK) and/or Pantone spot colors from the "Pantone Formula Guide SOLID". (Note: there is a set-up fee for each Pantone color used. If you want to print with Pantone colors, please call for a custom quote.)

### BLEED

Provide 1/4 - 1/2 inch bleed on all edges. ("Bleed" is the part of the artwork which extends past the template cut line.)

### QUARK USERS:

Will need to set template picture box fill color to NONE.